


NILE Series


5.12KWH / 10.24KWH
Battery Group / Floor-standing

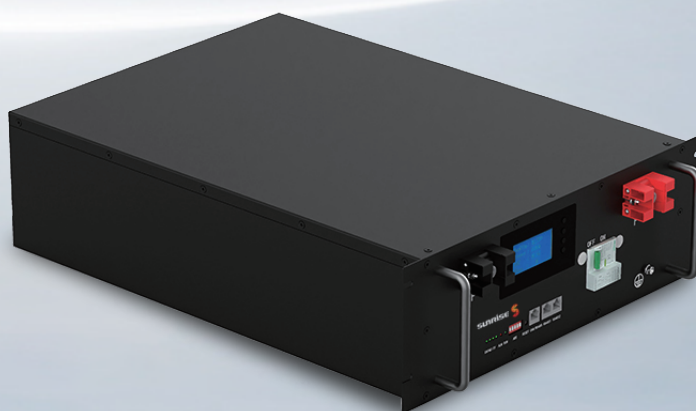

MODEL	NILE-R-100	NILE-R-200	
Standard Voltage	51.2V		
Nominal Capacity	100AH	200AH	
Nominal Power Storage	5.12KWH	10.24KWH	
Operating Voltage	42-58.4V		
Charging Current	50A	100A	
Max Charging/Discharging Current	100A		
Operating Temperature	0~40°C (Charging) , -20~40°C (Discharging)		
Storage Temperature	-10°C~35°C (1 Month) ,25±2°C (3 Month) ,65%±20%RH		
Communication Interface	CAN/RS485		
Cycle Life	6000 Cycles (25°C, 50A Charging/Discharging Current, 70%Standard Capacity, 80% DOD)		
Dimension(L*W*H)	600*430*160mm (Packaging size 700x640x200mm)	1044*430*160mm (Packaging size 1150x470x200mm)	
Weight	50±3kg (Gross Weight With Packaging53kg)	100KG±3kg (Gross Weight With Packaging103kg)	
Height	0-3000m		
Protection Class	IP20	Humidity Range	5-80%

SUNRISE ENERGY CO., LTD

Tel: +86-519-81688389 E-mail: info@sunriseenergy.cn
Add: No.20 Tongzi River West Road, Zhonglou Development Zone, Changzhou, Jiangsu, China

 If any update, Sunrise would not make further notice. Sunrise reserves the right of final interpretation.