

**600~620W**

**G12 solar modules** Zeus series

Mono SMBB TOPCon large size half cut  
bifacial double glass module


Products can match different installation conditions, taking into account high adaptability and high compatibility. With mature support and inverter scheme, customized design for distributed and centralized ground power stations.

### MODULE CHARACTER

-  Exceptional PID Resistance
-  Salt mist resistance/Ammonia resistance /dust and hail resistance
-  Production process reliability test
-  0~+5W Positive Tolerance
-  Lower LID / LETID
-  Reduce BOS cost increase ROI
-  Non-destructive cutting
-  Double-sided electricity generation

### CERTIFICATION

IEC61215/IEC61730  
ISO9001:Quality Management System  
ISO14001:Environmental Management System  
ISO45001:Occupational Health and Safety Management System

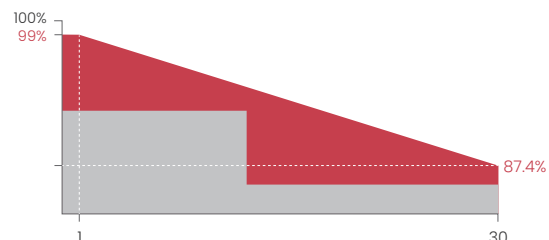

Linear performance warranty



Product warranty







# SR-66MNHLProD 600w-620w Zeus series



## ENGINEERING DRAWINGS

Module Type	SR-66M 600NHLProD		SR-66M 605NHLProD		SR-66M 610NHLProD		SR-66M 615NHLProD		SR-66M 620NHLProD	
	Module Efficiency (%)	22.24		22.42		22.61		22.79		22.98
Tolerance(W)	0~+5		0~+5		0~+5		0~+5		0~+5	
Test Environment	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power Pmax(W)	600	452.63	605	456.41	610	460.18	615	463.95	620	467.72
Open Circuit Voltage Voc(V)	47.76	45.62	47.95	45.80	48.16	46.00	48.39	46.22	48.61	46.43
Short Circuit Current Isc(A)	15.98	12.90	16.04	12.95	16.10	13.00	16.15	13.04	16.22	13.09
Maximum Power Voltage Vm(V)	39.47	37.04	39.63	37.19	39.80	37.35	39.99	37.52	40.17	37.69
Maximum Power Current Im(A)	15.21	12.27	15.27	12.31	15.33	12.36	15.38	12.40	15.44	12.45
Cell Type(mm)	G12 TOPCon									
Number of Cells (Pcs)	132(6×22)									
Maximum System Voltage (V)	DC1500									
Temp.Coeff.of Voc (%/°C)	-0.29									
Temp.Coeff.of Isc (%/°C)	0.04									
Temp.Coeff.of Pm (%/°C)	-0.25									
Operating Temperature (°C)	-40 to 85									
Nominal Operating Cell Temperature(NOCT) (°C)	45±2									
Max.Series Fuse (A)	35									
Pressure Bearing(Pa)	5400									
Wind Bearing (Pa)	2400									

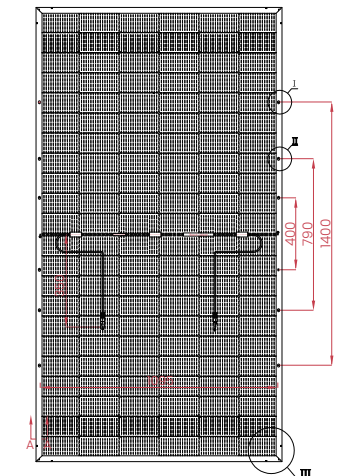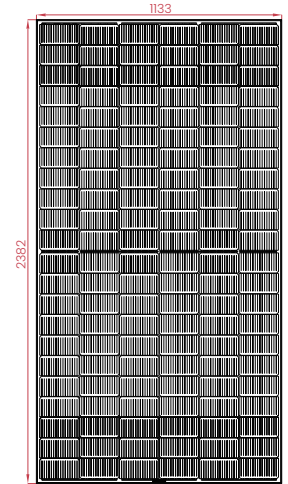

Length: ±2mm  
 Width: ±2mm  
 Thickness: ±1mm  
 Pitch-row: ±2mm

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5  
 NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind speed 1m/s

Different backside power gains(600W)	10%	15%	20%	25%
Peak Power Pmax(W)	660	690	720	750
Open Circuit Voltage Voc(V)	47.82	47.84	47.85	47.86
Short Circuit Current Isc(A)	17.60	18.40	19.19	19.99
Maximum Power Voltage Vm(V)	39.48	39.49	39.5	39.51
Maximum Power Current Im(A)	16.72	17.48	18.23	18.99


### MATERIAL DETAILS

Frame	Anodized aluminum	Cable&Connector	4mm <sup>2</sup> , EVO2 or EVO2 compatible
Cell	6×22pcs mono solar cell	Junction Box	Ip≥68, TÜV&UL
Glass	2×2.0mm Anti-Reflection Coating Heat Strengthened Glass	Net length of Cable	350mm or as customer's requirements


### PACKING DETAILS

Dimension	2382×1133×30mm	Weight	33.4kg
Loading Capacity	720pcs/40'HC	Packing	36pcs/pallet

### IV CURVES

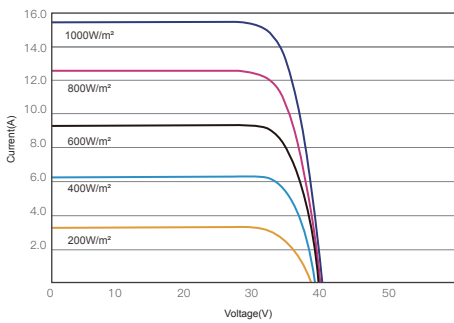

I-V CURVES OF PV MODULE(610W)

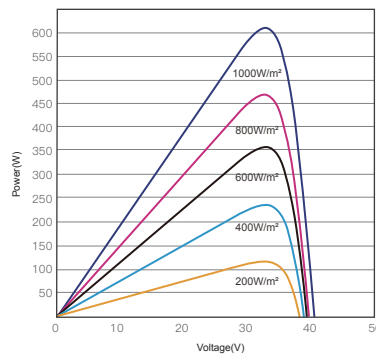

P-V CURVES OF PV MODULE(610W)