




585w~605w

M10 solar modules Aquaman series

Mono SMBB TOPCon large size half cut module


Excellent technical advantages and system design scheme to achieve high reliability, power generation effective gain and EPC cost reduction. Products can match different installation conditions, taking into account high adaptability and high compatibility. With mature support and inverter scheme, customized design for industrial and commercial and centralized ground power stations.

MODULE CHARACTER

-  Exceptional PID Resistance
-  Salt mist resistance/Ammonia resistance /dust and hail resistance
-  Production process reliability test
-  0~+5W Positive Tolerance
-  Lower LID / LETID
-  Reduce BOS cost increase ROI
-  Non-destructive cutting

CERTIFICATION

- IEC61215/IEC61730
- ISO9001:Quality Management System
- ISO14001:Environmental Management System
- ISO45001:Occupational Health and Safety Management System

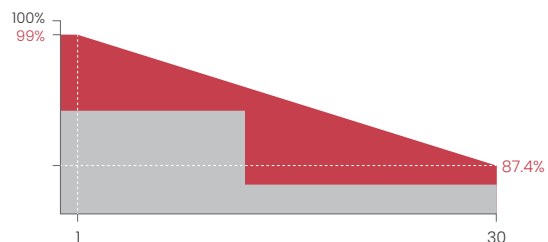

Linear performance warranty



Product warranty

SUNRISE ENERGY CO., LTD TEL: +86-519-81688389 E-mail: info@sunriseenergy.cn

ADD: No.20 Tongzi River West Road, Zhonglou Development Zone, Changzhou, Jiangsu

⚠ If any update, Sunrise would not make further notice. Sunrise reserves the right of final interpretation.



Module Type	SR-72M585NHLPro		SR-72M590NHLPro		SR-72M595NHLPro		SR-72M600NHLPro		SR-72M605NHLPro	
Module Efficiency (%)	22.14		22.33		22.51		22.7		22.89	
Tolerance (W)	0 ~ +5		0 ~ +5		0 ~ +5		0 ~ +5		0 ~ +5	
Test Environment	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power Pmax(W)	585	441.3	590	445.09	595	449	600	452.63	605	456.41
Open Circuit Voltage Voc(V)	51.50	49.19	51.69	49.38	51.89	49.56	52.08	49.75	52.27	49.93
Short Circuit Current Isc(A)	14.52	11.72	14.60	11.78	14.66	11.84	14.73	11.90	14.80	11.95
Maximum Power Voltage Vm(V)	42.55	39.93	42.71	40.08	42.87	40.23	43.03	40.38	43.19	40.53
Maximum Power Current Im(A)	13.75	11.09	13.82	11.14	13.88	11.19	13.95	11.25	14.01	11.30
Cell Type (mm)	M10 TOPCon									
Number of Cells (Pcs)	144(6×24)									
Maximum System Voltage (V)	DC1500									
Temp.Coeff.of Voc (%/°C)	-0.249									
Temp.Coeff.of Isc (%/°C)	0.045									
Temp.Coeff.of Pm (%/°C)	-0.3									
Operating Temperature (°C)	-40 to 85									
Nominal Operating Cell Temperature(NOCT) (°C)	45±2									
Max.Series Fuse (A)	25									
Pressure Bearing (Pa)	5400									
Wind Bearing (Pa)	2400									

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5
 NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s


MATERIAL DETAILS

Frame	Anodized aluminum	Net length of Cable	350mm or as customer's requirements
Cell	6×24pcs mono solar cell	Junction Box	IP≥68, TÜV & UL
Diode quantity	3	Cable&Connector	4mm ² , EVO2 or EVO2 compatible
Glass	3.2mm Anti-Reflection Coating Heat Strengthened Glass		


PACKING DETAILS

Dimension	2333×1133×30mm	Weight	30.2kg
Loading Capacity	720pcs/40HC	Packing	36pcs/pallet


ENGINEERING DRAWINGS

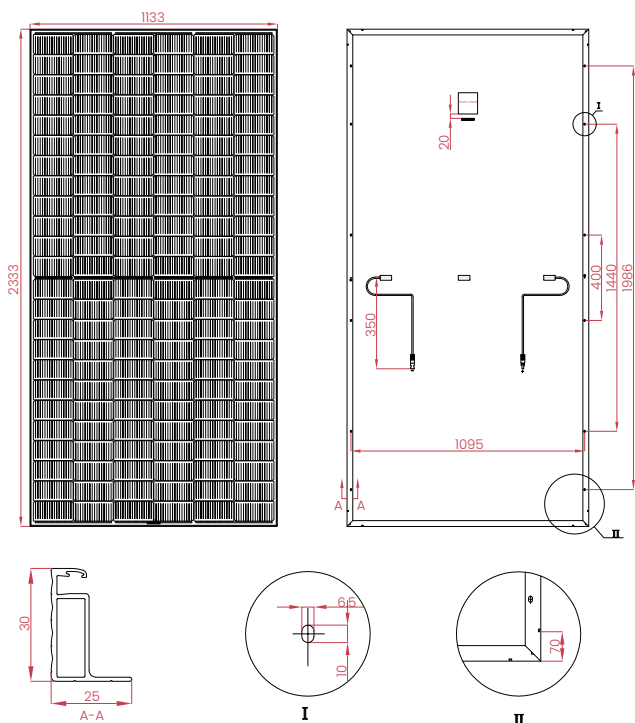

IV CURVES

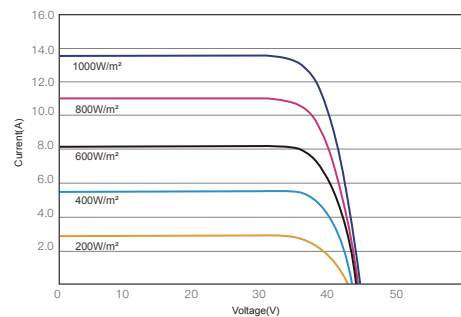

I-V CURVES OF PV MODULE(595W)

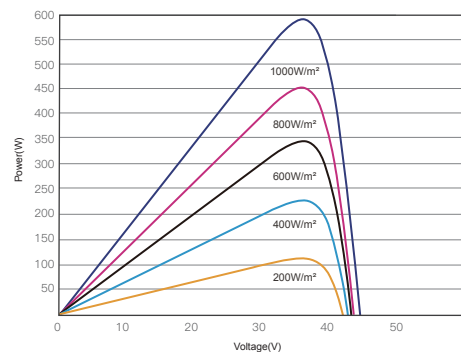

P-V CURVES OF PV MODULE(595W)